

## TYPICAL METER SETTING 1" SHORT SERVICE

18" Low Profile Meter Box Ring & 18" to 24" ADAPTOR for 24" tile – Clay & Baily or approved equal 18" Meter Box Lid Clay & Marker Stake (to be painted blue or – wrapped with blue tape) Contractor to furnish and install PVC Plugs in the inlet & outlet meter Coupling nuts on the Copper Setter. ections to be 18" Finish Grade Elev 1" Corp. Stop (Compression) - Customers Service to 1" Service Tubing be installed by others - Dx1" Service Saddle


Bore hole under paving shall be a maximum of 2" in diameter and a minimum of 36" below top of paving.

## TYPICAL METER SETTING 1" LONG SERVICE

#### NOTES:

- Services will be bid on a per each basis for long and short services. Long service line length is greater than 20'. Short services measure less than 20'.
- 2. Install setters and meter cans for  $\frac{5}{8}$  x  $\frac{3}{4}$  meters. Water meters will not be installed.
- Meter box lid elevations shall be set at .3' above top of curb (typ).
- Meter Setters shall be AY McDonald Mfg. Co., Series 22-Horizontal Style.
- Typical meter setting componets will be as follows:

  - 1- Clay & Baily Part No. P2210 lid or approved equal.
    1- Clay & Baily 18" inch low profile ring Part No. 2205, or approved equal.
    1- Clay & Baily 18" to 24" ADAPTOR for 24" tile Part No. 2424 or approved
- Any parts substituted for those specified shall meet or exceed the specifications of said manufacture; Clay & Baily
- All service connections to be 18" outside of meter box.
   All service connections shall come with w/PVC plugs.

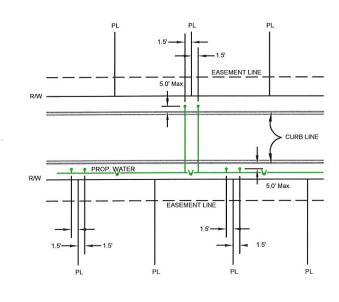

# TYPICAL SERVICE LOCATION

SERVICES TO BE LOCATED 1.5' FROM SIDE PROPERTY LINE UNLESS OTHERWISE INDICATED ON SERVICE LINE LOCATION MAP






Revision/Issue

CITY OF MAIZE 10100 GRADY AVE. MAIZE,KS. 67101-0245

TYPICAL METER SERVICES SETTINGS

11/19/13

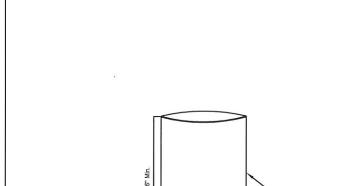

## **TYPICAL 21" METER SETTING BOX**

(2) Cut outs to be on opposite sides